

PL ISSN 0033-2097, e-ISSN 2449-9544

3'2020




PRZEGLĄD ELEKTROTECHNICZNY

ROK XCVI

PRASA FACHOWA
SIGMA-NOT
www.sigma-not.pl

cena 55 zł
(w tym 8% VAT)

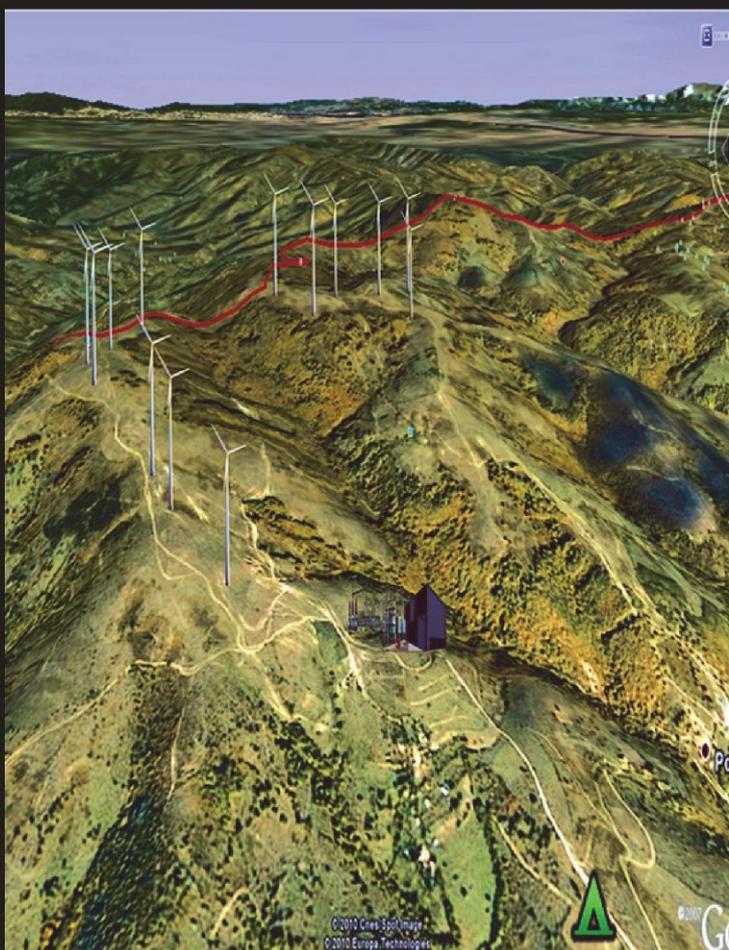

*Projekt rozmieszczenia farm wiatrowych w Kosowie
str. 125*

*W numerze: wybrane prace po konferencji
„Jakość Dostaw Energii Elektrycznej - JDEE”*

Contents

01	Andrzej OLENCKI, Daniel BELICA, Jarosław MARKIEWICZ, Piotr MRÓZ - Power network parameters standards with implements IEEE-1459 Power Definitions	1
02	Krzysztof CHMIELOWIEC, Grzegorz WICZYŃSKI, Andrzej FIRLIT, Mateusz DUTKA, Szymon BARCZENTEWICZ - The use of measurement aggregated data to detect the sources of disturbances in electrical distribution systems	5
03	Michał JASIŃSKI, Tomasz SIKORSKI, Klaudiusz BORKOSWSKI - Application of cluster analysis to identification flagged power quality measurements in area-related approach	9
04	Krzysztof PIĄTEK, Mateusz DUTKA, Grzegorz WICZYŃSKI, Tomasz SIOSTRZONEK, Krzysztof CHMIELOWIEC - Selection of metering points in a distribution system for power quality parameters measurement	13
05	Łukasz TOPOLSKI, Wojciech SCHAB, Andrzej FIRLIT, Krzysztof PIĄTEK - Analysis of the impact of dispersed generation on selected aspects of power quality in a low-voltage electricity network located in the area of energy cluster Virtual Green Ochotnica Power Plant	17
06	Waldemar DOŁĘGA - Operation security of national distribution grids	21
07	Lubomir MARCINIAK - Asymmetry parameters for zero sequence component in medium voltage networks	25
08	Roman KROK - Adaptation of 120 MW class generators for synchronous compensator operation	29
09	Andrzej SZROMBA¹, Bartłomiej SYSŁO - UPQC active power filter controlled with the use of the load equivalent conductance signal	33
10	Łukasz TOPOLSKI, Andrzej FIRLIT, Krzysztof PIĄTEK, Zbigniew HANZELKA - Limitation of voltage swells and unbalance caused by single-phase photovoltaic microinstallations using a series automatic voltage regulator in a low-voltage network	37
11	Jarosław CZORNIK, Maciej HALTOF - The effect of harmonic filters on improvement of electrical energy parameters at point of common coupling	42
12	Hubert BIAŁAS, Ryszard PAWEŁEK, Irena WASIAK - Possibilities of islanding operation of wind power plants	47
13	Patryk SZYWALSKI, Andrzej WAINDOK, Bronisław TOMCZUK - Implementation of a drones group in the area of extra high voltage grids	51
14	Mirosław WCISLIK, Paweł STRZĄBAŁA - Analysis of interactions in the circuit of the power system with nonlinear load and LC passive filter	55
15	Andrzej FIRLIT, Zbigniew HANZELKA, Krzysztof PIĄTEK, Szymon BARCZENTEWICZ, Krzysztof CHMIELOWIEC, Mateusz DUTKA - Monitoring the power quality, including supraharmonics and synchrophasors	59
16	Mirosław KORNATKA - Analysis of the variability of indicators SAIDI, SAIFI and MAIFI values in the context of quality regulation	63
17	Marek GAŁA, Janusz RAK, Kazimierz JAGIEŁA, Antoni SAWICKI - Impact of phenomena in a high-current circuit for operation of the AC arc furnace supply system	67
18	Piotr MAKLES - Measurement of disturbances of switched-mode power supplies energy-saving light sources	73
19	Yuriy VARETSKY¹, Michał GAJDZICA - The procedure for selecting the ratings of capacitor banks and reactors of the filtering systems	77
20	Rabah ARARIA, Karim NEGADI, Mohamed BOUDIAF, Fabrizio MARIGNETT - Non-Linear Control of DC-DC Converters for Battery Power Management in Electric Vehicle Application	82
21	Nga Yan Li, Zahriadha Zakaria, Noor Azwan Shairi, Hussein Alsariera, Rammah Alahnomi - Design and Investigation on Wideband Antenna based on Polydimethylsiloxane (PDMS) for Medical Imaging Application	89
22	Yuriy SHAPOVALOV, Dariya BACHYK, Ksenia DETSYK, Roman ROMANIUK - Application of the Frequency Symbolic Method for the Analysis of Linear Periodically Time-Varying Circuits	93
23	Nhlanhla MBULI, Siyabonga SIKHAKHANE, Modisane SEITSHIRO, and Jan Harm C PRETORIUS - Frequency of Forced Outages for Subtransmission Circuit Breakers: Statistical Analysis of Data for the Period 2005-1	98
24	Alexey VASILEV, Ruslan UFA - Algorithm of voltage and reactive power regulation based on the particle swarm method	107
25	Badr Mesned Alshammari, Tariq Masood, Muhammad Tajammal Chughtai, Samer Karim - Understanding HVDC/FACTS Controller's Sustainable Development & Comparative Analyses of GTO, GCT, IGBT, MTO, ETO, MCT and MOSFET Operations	111
26	Heri SURYOATMOJO, Mohamad RIDWAN^{*)}, Irham IZZATUR RAHMAN, Dedet CANDRA RIAWAN, Mochamad ASHARI - Design of Bidirectional DC-DC Cuk Converter for Testing Characteristics of Lead-Acid Battery	114
27	Oleksander RUBANENKO, Maksim GRISHCHUK, Olena RUBANENKO - Planning of the experiment for the defining of the technical state of the transformer by using amplitude-frequency characteristi	119
28	Bukurije HOXHA¹, Bedri DRAGUSHA - Wind Energy Prediction in Kosovo by WAsP11 software	125
29	Alena MIKITCHUK, Konstantin KOZADAEV - Comprehensive theoretical study of optical, thermophysical and acoustic properties of surface nanostructures with metallic nanoparticles for fiber-optic photoacoustic ultrasound transducer	129
30	Nadiaa ACHOU, Mohammed Nasser TANDJAOUI, Chellali BENACHAIBA, Mokhtar BENDJEBBAR - Protection System for Induction Motor based on Sugeno Inference	138
31	Stanisław OSOWSKI², Krzysztof SIWEK - CNN application in face recognition	142
32	Jerzy GOŁĘBIEWSKI, Marek ZARĘB- Temperature-time profiles of a tubular bus in shorting conditions	146
33	Fyodor ROMANYUK¹, Vladimir RUMIANTSEV¹, Alena DZIARUHINA, Vladislav KACHENYA¹, Konrad KIERCZYNSKI - Increase of operation speed of digital measuring elements of microprocessor protection of electrical installations	150
34	Jarosław FORENC - The application of GPU in the analysis of transient temperature field in a three-dimensional model of electric floor heating system	154
35	Olena SOLONA¹, Ihor KUPCHUK - Dynamic synchronization of vibration exciters of the three-mass vibration mill	161
36	Marian PASKO, Tomasz ADRIKOWSKI, Dawid BUŁA, Damian BŁASZCZOK - Power losses in the reactive power compensator built of capacitor banks and protective chokes	166
37	Tomasz RYMARCZYK, Michał GOŁĄBEK, Tomasz CIEPLAK, Konrad KANIA, Przemysław ADAMKIEWICZ - Ultrasonic tomography for reflection and transmission wave analysis	170
38	Tomasz RYMARCZYK, Jakub SZUMOWSKI, Tomasz CIEPLAK, Konrad NIDERLA, Przemysław ADAMKIEWICZ - Analysis of vertical and horizontal flows of liquids and gases through a wire-mesh sensor	174
39	Jerzy HICKIEWICZ, Piotr RATAJ, Przemysław SADŁOWSKI - Activities of associations of Polish electrical engineers until the outbreak of World War I	178

doi:10.15199/48.2020.03.35

Dynamic synchronization of vibration exciters of the three-mass vibration mill

Abstract. The problem of self-synchronization of a three-axis vibrating mill with four unbalance vibrators, which are actuated by independent asynchronous motors and have the same angular velocities, is considered in the paper. In self-synchronization, synchronization and phase matching of the vibrator is achieved due to the vibration of the system of bodies on which the vibrator is installed, that is, by providing a dynamic connection between them.

Streszczenie. W artykule analizowano problem synchronizacji trzyosiowego wibracyjnego młyna z czterema niezależnymi wibratorami. Samoczynna synchronizacja została osiągnięta dzięki dynamicznemu połączeniu między wibratorami i podłożem. **Dynamiczna synchronizacja trzyosiowego młyna z czterema wibratorami.**

Keywords: vibration exciter, imbalance, synchronization, milling chamber.

Słowa kluczowe: wibracja, młyn wibracyjny, synchronizacja.

Introduction

The fundamental disadvantage of single-vibration vibratory mills is that the exciter's force is limited by the permissible loads of their bearing assemblies, as well as difficulties in assembling and disassembling them. Therefore, the creation of powerful vibration exciters is possible, first of all, by aggregation of universal simple (two-support) vibration exciters.

The aggregation of vibration exciters can significantly reduce the time and reduce the cost of design and manufacture of vibration mills, while at the same time simplify their maintenance and repair. In other cases, the use of several low-power exciters instead of one equal in power is due to the need to bridge the forced force over the vibrating working body of a vibrating mill of considerable size. Aggregation of vibration exciters can be carried out sequential, parallel, as well as mixed.

The synchronization of the rotation of the vibrators is necessary to create a continuous movement of the working body (camera) of the vibrating mill in a circular path and is provided mainly by three methods of synchronization: using special shafts, gears, chain or belt transmissions, forced electrical synchronization (using an electric shaft system or synchronous motors) or self-synchronization. Obviously, the best way to synchronize is to self-synchronize, since it does not require additional devices that complicate the design.

In recent years, dynamic synchronization (self-synchronization) has been widely used in vibration technology. The phenomenon of dynamic synchronization consists in the fact that several artificially created or natural objects, which, in the absence of interaction, make oscillatory or rotating movements with different frequencies when long weak links are superimposed, begin to move with the same or multiple frequencies, which are in rational relations, moreover, certain phase relations between oscillations and rotations are established.

Analysis of literary sources and problem statement

One of the main parameters of vibration mills is the maximum power that is transmitted by the exciters to the load through the grinding chamber at a given amount of force, which is developed by the exciters themselves [1, 2]. It was found that the maximum power is transmitted to the load when the camera moves along a circular path, which determines the location of the vibration exciters [3].

The creation of powerful vibration exciters is possible by aggregating simple universal (two-support) vibration exciters. This allows you to reduce the time significantly and

reduce the cost of designing and manufacturing vibratory mills [4, 5, 6], while simplifying their repair and maintenance. In other cases, the use of several low-power exciters instead of one equal in power is due to the need to disperse the force over the vibrating working body with a large-sized vibrating mill.

The most optimal of the methods of synchronization is self-synchronization, in which the synchronism and phase matching of the vibration exciters is achieved by establishing a dynamic connection between them.

Analyzing the methods of aggregating vibration exciters to create the translational movement of the working body of the vibratory mill along a circular path and the necessary synchronism and phase matching, it can be mentioned that dynamic synchronization (self-synchronization) is currently widely used [7, 8, 9, 10, 11, 12].

The solution of specific applied problems of self-synchronization of vibration exciters can be most effectively performed using the integral criterion of stable synchronous movements [6].

Achieving stability of the required synchronous rotation mode of vibration exciters is achieved by combining, firstly, by attaching some additional mass to the initial supporting solid using elastic elements, and secondly, by changing the number of vibration exciters [12, 13, 14].

In the works [15, 16, 17] the technological efficiency of such vibro-installations is shown.

In the Laboratory of Theory of Mechanisms and Machines of Vinnitsa National Agrarian University, a schematic diagram of a vibrating mill with a spatial-circular trajectory of technological environment motion was developed [5, 18, 19].

The working body of the vibrating mill (Fig. 1) contains closed grinding chambers 4, which are filled with grinding bodies (balls) by means of a reloading 1 and a transition trench 6. Under the action of a vibrating action, the technological environment (grinding bodies and material) 5 in the left grinding chamber 4 rises vertically through the trough 1 and flows over the transport tray 2 into the right grinding chamber. The crushed material is sieved through the unloading grate 3 and unloaded from the mill. In this case, the grinding bodies are diverted to the front of the right grinding chamber in the loading area of the material. In the front of the right grinding chamber due to the continuous passage on the chute 1 and the transport tray 2 is formed an increased volume of technological environment. Crushed material also comes here. In the back of the grinding chamber, due to the transition of part of the

process environment into the left grinding chamber, a reduced volume of process environment is formed. In the left grinding chamber due to the selection of technological environment in the front part produces a reduced volume, and in the rear, due to the influx of technological environment from the right grinding chamber produces an increased volume. Thus, in the interconnected grinding chambers provides spatial-circulation movement of the technological environment in a closed screw trajectory.

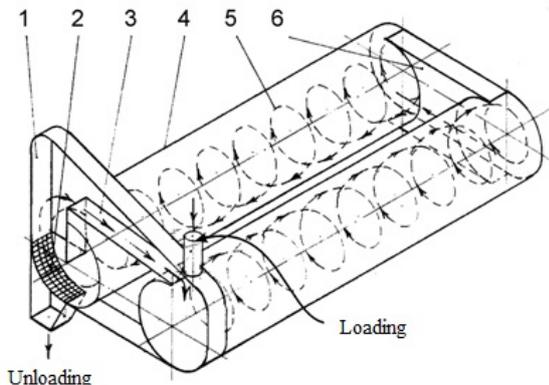


Fig. 1. Scheme of the executive body of the vibration mill with the spatial-circular trajectory of the technological environment: 1 – reloading chute; 2 – transport tray; 3 – unloading grid; 4 – grinding chamber; 5 – the trajectory of movement of the technological environment (grinding bodies and material); 6 – transitional gutter.

Due to the spatial-circulation movement of the technological environment, which is provided by the vibration action, this mill design provides continuous grinding, excluding passive zones. This allows to significantly reduce the specific energy consumption for the technological grinding operation. However, to ensure efficient operation of the proposed design of the vibrating mill, it is necessary to set the criteria for stable motion of the technical system, which will ensure the dynamic synchronization of independent vibrators of the machine.

Purpose and tasks of research

The purpose of the research is to investigate the scheme of a vibratory mill with a U-like working chamber aggregated in parallel with simple two-support vibration exciters and establish criteria for stable movement.

The main task about the self-synchronization of mechanical vibration exciters is to determine the conditions under which all vibration exciter rotors rotate with the same average angular velocities beyond the absolute value, $|\dot{\varphi}_s^*| = \omega$ ($s = 1 \dots k$) despite the possible difference in their parameters and the forces acting on them, and the supporting bodies undergo oscillations with a period $T = 2\pi / \omega$.

Materials and methods

Solutions to specific applications of self-synchronization of vibration exciters can be most effectively performed by using the integral criterion of persistent synchronous movements. According to this criterion, the phases of rotation of vibration exciters in stable synchronous movements correspond to the minimum points of some function D of these phases, which is called potential. For problems important for practice (including the one under consideration), it turns out that the potential function is equal to the average over the period value of the Lagrange function L of the vibrational part of the system:

$$(1) \quad D = \frac{\omega}{2\pi} \int_0^{2\pi/\omega} L dt = \frac{\omega}{2\pi} \int_0^{2\pi/\omega} (T - P) dt;$$

where T , P are the kinetic and potential energies of the vibrational part of the system, respectively.

The practical technique for researching devices with self-synchronizing vibration exciters is characterized by the following sequence of actions:

- the equations of small vibrations of the bearing bodies are added with the assumption that the shafts of the vibration exciters rotate uniformly, according to the law:

$$(2) \quad \varphi_s = \omega t + \alpha_s,$$

where α_s are unknown initial phases of rotation, ω is the angular velocity of synchronous rotation;

- by these equations the law of motion of the bearing bodies is determined, which corresponds to constant forced oscillations (this is a potential function);

- the value of phase displacements α_s , which can correspond to stable synchronous movements and conditions of stability, are found from the conditions of minimum potential function.

The grinding chamber (Fig. 2) of mass M_1 is considered to be an absolutely rigid body mounted on a fixed base with the help of sufficiently soft elastic elements ($c_0 \approx 0$). On the camera, two identical additional solid bodies are installed symmetrically with respect to the vertical axis using elastic elements with rigidity c , the mass of each is equal to M_2 . The camera is driven into vibration using four unbalanced vibration exciters, each of which is equipped with an individual drive. The generalized coordinates of the oscillatory system are: x , y and φ – coordinates that correspond to the horizontal, vertical and angular movements of the container, and x_1 , y_1 and x_2 , y_2 – coordinates that correspond to the horizontal and vertical movements of the first and second additional bodies.

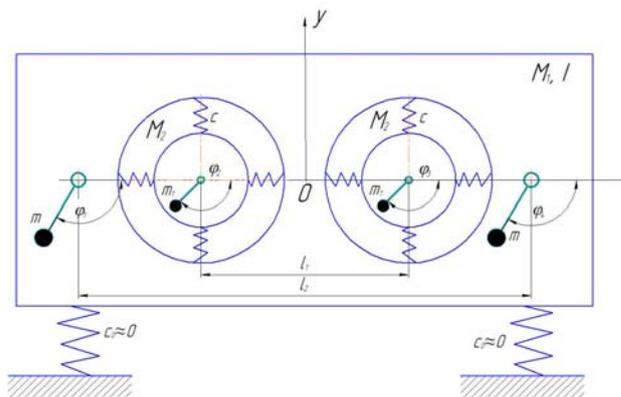


Fig. 2. Three-mass vibratory mill with four vibration exciters (kinematic scheme)

Thus, in this article, a theoretical study of the steady motion of a three-mass four-vibration mill is carried out and an analysis is carried out with specific technological and dynamic parameters. These parameters were obtained and substantiated by the results of experimental studies [20] of the pilot industrial model of the MV-400 vibrating mill (Fig. 3). This mill was developed in the laboratory of the theory of mechanisms and machines of Vinnitsa National Agrarian University.

The analysis of the conditions for the minimum of the function D by the analytical method is rather complicated due to the large bulkiness of the coefficients. Therefore, the studies were carried out numerically using a PC and the Maple V software package.



Fig. 3. Vibrating mill (MV-400)

Research results

The equations for the kinetic and potential energy of the vibrational part of the system have the form:

$$(3) \quad T = \frac{I}{2} \left[M_1(\dot{y}^2 + \dot{x}^2) + I\dot{\varphi}^2 + M_2(\dot{x}_1^2 + \dot{x}_2^2 + \dot{y}_1^2 + \dot{y}_2^2) \right];$$

$$(4) \quad P = \frac{I}{2} c \left[(x-x_1)^2 + (x-x_2)^2 + (y-l_1\varphi-y_1)^2 + (y+l_1\varphi-y_2)^2 \right];$$

The differential equations of motion of the vibration unit with uniform rotation of the exciters will have the form:

$$(5) \quad \begin{cases} M_1\ddot{y} + c(y-y_1) + c(y-y_2) = \\ -F[\sin(\omega t + \alpha_1) + \sin(\omega t + \alpha_4)]; \\ M_1\ddot{x} + c(x-x_1) + c(x-x_2) = \\ F[\cos(\omega t + \alpha_1) + \cos(\omega t + \alpha_4)]; \\ I\ddot{\varphi} + cl_1(l_1\varphi + y_1) + cl_1(l_1\varphi - y_2) = \\ Fl_2[\sin(\omega t + \alpha_1) - \sin(\omega t + \alpha_4)]; \end{cases};$$

$$(6) \quad \begin{cases} M_2\ddot{x}_1 - c(x-x_1) = F_1 \cos(\omega t + \alpha_2); \\ M_2\ddot{x}_2 - c(x-x_2) = F_1 \cos(\omega t + \alpha_3); \\ M_2\ddot{y}_1 - c(y-y_1) + cl_1\varphi = -F_1 \sin(\omega t + \alpha_2); \\ M_2\ddot{y}_2 - c(y-y_2) - cl_1\varphi = -F_1 \sin(\omega t + \alpha_3); \end{cases};$$

where $F = mr\omega^2$, $F_1 = m_1r_1\omega^2$ – the driving force that develops by each vibration exciter (mr ; m_1r_1 – masses and eccentricities of vibration exciters mounted respectively on the container and additional bodies).

The determinants for calculating the frequencies of free vibrations that correspond to two independent groups of homogeneous equations that correspond to system (5) and (6) can be represented in the following form [15]:

$$(7) \quad \begin{vmatrix} 2c - M_1p^2 & -c & -c \\ -c & c - M_2p^2 & 0 \\ -c & 0 & c - M_2p^2 \end{vmatrix} = 0;$$

$$(8) \quad \begin{vmatrix} 2c - M_1p^2 & -c & -c & 0 \\ -c & c - M_2p^2 & 0 & cl_1 \\ -c & 0 & c - M_2p^2 & -cl_1 \\ 0 & cl_1 & -cl_1 & 2cl_1^2 - Ip^2 \end{vmatrix} = 0.$$

According to (8) write the frequency equation:

$$(9) \quad (c - M_2p^2)(M_1M_2p^2 - 2cM_2 - cM_1)p^2 = 0.$$

As a result, we find:

$$(10) \quad p_1 \approx 0, p_2^2 = \frac{c}{M_2}, p_3^2 = \frac{c}{M^*},$$

$$\text{where } M^* = \frac{M_1M_2}{2M_2 + M_1}.$$

Taking into consideration the higher order of the determinant (8), as a result we have, the very large computational complexity that correspond to the natural frequency determined on a PC using the standard Maple V computer software package:

$$(11) \quad p_4 \approx 0, p_5^2 \approx 0, p_6^2 = \frac{c}{M^*}, p_7^2 = \frac{c(I + 2M_2l_1^2)}{M_2I}.$$

The solution of differential equations (5) and (6) which corresponds to a constant forced oscillation can be written in the form:

$$(12) \quad \begin{cases} x = A_1[\cos(\omega t + \alpha_1) + \cos(\omega t + \alpha_4)] \\ + A_3[\cos(\omega t + \alpha_2) + \cos(\omega t + \alpha_3)]; \\ x_1 = A_2[\cos(\omega t + \alpha_1) + \cos(\omega t + \alpha_4)] \\ + A_4 \cos(\omega t + \alpha_2) + A_5 \cos(\omega t + \alpha_3); \\ x_2 = A_2[\cos(\omega t + \alpha_1) + \cos(\omega t + \alpha_4)] \\ + A_3 \cos(\omega t + \alpha_2) + A_4 \cos(\omega t + \alpha_3); \\ \varphi = -A_{10}[\sin(\omega t + \alpha_1) - \sin(\omega t + \alpha_4)] \\ - A_3[\sin(\omega t + \alpha_2) - \sin(\omega t + \alpha_3)]; \\ y = -A_1[\sin(\omega t + \alpha_1) - \sin(\omega t + \alpha_4)] \\ - A_3[\sin(\omega t + \alpha_2) + \sin(\omega t + \alpha_3)]; \\ y_1 = A_6 \sin(\omega t + \alpha_1) + A_7 \sin(\omega t + \alpha_2) \\ + A_8 \sin(\omega t + \alpha_2) + A_9 \sin(\omega t + \alpha_3); \end{cases};$$

$$\text{Here is denoted: } A_1 = \frac{bF}{ba + 2c^2}; \quad A_2 = \frac{cF}{ba + 2c^2};$$

$$A_3 = \frac{cF_1}{ba + 2c^2}; \quad A_4 = \frac{F_1(ba - c^2)}{b(ba - 2c^2)}; \quad A_5 = \frac{F_1c^2}{b(ba - 2c^2)};$$

$$A_6 = \frac{cF[(db - 2c^2l_1^2) - l_1l_2(2c^2 - ab)]}{(db - 2c^2l_1^2)(2c^2 - ab)};$$

$$A_7 = \frac{cF[(db - 2c^2l_1^2) - l_1l_2(2c^2 - ab)]}{(db - 2c^2l_1^2)(2c^2 - ab)};$$

$$A_8 = \frac{F[a(db - 2c^2l_1^2) + c^2(2c^2 - ab)]}{(db - 2c^2l_1^2)(2c^2 - ab)};$$

$$A_9 = -\frac{c^2F_1(al_1^2 - d)}{(db - 2c^2l_1^2)(2c^2 - ab)}; \quad A_{10} = -\frac{Fl_2b}{2c^2l_1^2 - db};$$

$$A_{11} = -\frac{F_1cl_1}{2c^2l_1^2 - db}; \quad a = 2c - M_1\omega^2; \quad b = c - M_2\omega^2;$$

$$d = 2cl_1^2 - I\omega^2.$$

To solve the problem, we use the integral stability criterion, and as a potential function, we can take the average value of the Lagrange function of the vibrational system over a period. The period average value of the Lagrange function in the calculation of equations (1) for kinetic and potential energy and solutions (12):

$$D = \frac{\omega}{2\pi} \int_0^{\frac{2\pi}{\omega}} (T - P) dt = D_1 \cos(\alpha_1 - a_1) + D_2 \cos(a_1 - a_2) \\ + D_3 \cos(a_1 - a_3) + D_4 \cos(a_2 - a_3) \\ + D_5 \cos(a_2 - a_4) + D_2 \cos(a_3 - a_4) + C_1,$$

where C_1 – value independent of angles α_s ;

$$D_1 = m\varepsilon\omega^2 \left(A_3 + \frac{A_{10}l_2}{2} \right); \quad D_2 = m\varepsilon\omega^2 \left(A_3 - \frac{A_{11}l_2}{2} \right);$$

$$D_3 = m\varepsilon\omega^2 \left(A_3 + \frac{A_{11}l_2}{2} \right); \quad D_4 = \frac{m_1\varepsilon_1\omega^2}{2} (A_5 - A_9).$$

Equating the derivatives to zero $\partial D / \partial \alpha_s$, we obtain an equation for determining the values of the constants α_s in possible synchronous movements.

Moreover, since the problem of self-synchronization is considered, we equate one of the phases (for example α_4) to zero.

$$(13) \quad \begin{cases} D_1 \sin \alpha_1 + D_2 \sin(\alpha_1 - a_2) + D_3 \sin(a_1 - a_3) = 0; \\ D_2 \sin(\alpha_1 - a_2) - D_4 \sin(\alpha_2 - a_3) - D_3 \sin a_2 = 0; \\ D_4 \sin(\alpha_2 - a_3) - D_2 \sin \alpha_3 + D_3 \sin(\alpha_1 - a_3) = 0. \end{cases}$$

Equation (13) can satisfy the following five phase combinations α_s :

$$(14) \quad \alpha_1^* = \alpha_2^* = \alpha_3^* = 0;$$

$$(15) \quad \alpha_1^* = 0; \alpha_2^* = \alpha_3^* = \pi;$$

$$(16) \quad \alpha_1^* = \alpha_2^* = \pi; \alpha_3^* = 0;$$

$$(17) \quad \alpha_1^* = \pi; \alpha_2^* = \alpha_3^* = 0;$$

$$(18) \quad \alpha_1^* = \alpha_2^* = 0; \alpha_3^* = \pi.$$

The condition for the stability of synchronous movements, in accordance with the integral criterion, is the condition for the minimum potential function.

Consider the possibility of stabilizing synchronous-in-phase rotation of two main vibration exciters using two additional vibration exciters on elastically suspended bodies [15, 17]. Taking into account the results of solving the problem [10], it is envisaged to obtain a positive effect upon rotation of additional vibration exciters in the antiphase relative to the main one (second group of solutions (7)). In this case, the last inequality will look like this: solution [15, 14], it is envisaged to receive a positive effect, when additional vibration exciters rotate in anti-phase on the main (15). In this case, the last inequality will have the following form:

$$(19) \quad \begin{vmatrix} -D_1 + D_2 + D_3 & -D_1 & -D_3 \\ -D_2 & D_2 + D_3 - D_4 & D_4 \\ -D_3 & D_4 & D_2 + D_3 - D_4 \end{vmatrix} > 0.$$

Then we come to the following condition for the stability of the considered motion:

$$(20) \quad \begin{cases} -D_1 + D_2 + D_3 > 0; \\ D_5 > 0; \\ D_2 + D_3 > 0; \\ \text{or} \\ \frac{I}{\lambda_2^2 - I} > 0; \\ D_6 > 0; \end{cases},$$

where:

$$(21) \quad D_5 = -(D_2 + D_3)(D_1 + D_4) + 2D_2D_3 + D_1D_4 + D_3^2;$$

$$(22) \quad D_6 = -(D_2 + D_3)(D_1 + D_4) + 2D_2D_3 + 2D_1D_4.$$

A graphical solution of these conditions for the second group of phase combinations is shown in Fig. 4.

Graphing was performed using the standard Maple V software package and using known input parameters that were experimentally justified earlier [20]: $M_1 = 120$ kg; $M_2 = 20$ kg; $l_2 = 0.325$ m; $l_1 = 0.16$ m; $m\varepsilon / m_1\varepsilon_1 = 0.2$; $I = 7.6$ kg·m²; $ML_2^2 / I = 1.44$; $\lambda_2 = \frac{P_2}{\omega} M = M_1 + M_2$.

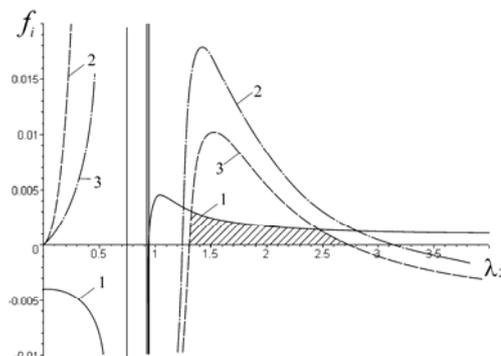


Fig. 4. Function graph for determining the area of synchronous motion of vibration exciters ($ML_2^2 / I = 1.44$) – $f_i(\lambda_2)$

Thus, the successful use of self-synchronization of more than two vibration exciters is possible when additional exciters are installed on elastically suspended bodies; such exciters can stabilize the synchronous-in-phase rotation of two main vibration exciters. Note that the obtained research results are consistent with [12] (where only the final result is presented in the form of charts of solving the Fortran problem for a system with specific parameters) and in a certain content they are supplemented and refined.

Conclusions

The considered dynamic circuit can provide self-synchronization of vibration exciters, while all the symmetrical vibrations of the vibration mill are possible, which are of practical interest.

The resistance limit of synchronous rotations of vibration exciters is established, which allows you to choose the optimal installation parameters and its operation modes.

The presented dynamic scheme makes it possible to change the phases of rotation of pathogens by changing their operating frequency (rotation).

The stability of one or another mode of exciters rotation depends primarily on the elastic suspension rigidity of additional bodies and the frequency of exciters rotation.

Authors: PhD. Techn. Sc., Ass. Prof., Head of the department of general technical disciplines and labor protection, Faculty of Engineering and Technology, Vinnytsia National Agrarian University, 3 Sonyachna str., Vinnytsia, Ukraine, 21008, E-mail: solona_o_v@ukr.net; PhD. Techn. Sc., Sen. Lect., Deputy Dean for Science, Faculty of Engineering and Technology, Vinnytsia National Agrarian University, 3 Sonyachna str., Vinnytsia, Ukraine, 21008, E-mail: kupchuk.igor@i.ua.

REFERENCES

- [1]. Kudinov Ye.S., Boiko I.H., Analysis of methods for grinding grain feed in accordance with their energy intensity, *Bulletin of the Kharkiv National Technical University of Agriculture named after Peter Vasylenko. Series: Technical Sciences*, 95 (2010), 5-12
- [2]. Hvozdiev O.V., Shpyhanovych T.O., Yalpachyk O.V., Improvement of grain grinding process, *Collection of scientific works of Vinnytsia National Agrarian University. Series: Technical Sciences*, 11 (2011), 143-150
- [3]. Yanovych V., Honcharuk T., Honcharuk I., Kovalova K., Engineering management of vibrating machines for targeted

- mechanical activation of premix components, *Inmateh – Agricultural Engineering*, 54 (2018), nr. 1, 25-32
- [4]. Yanovych V., Kupchuk I., Determination of rational operating parameters for a vibrating disk-type grinder used in ethanol industry, *Inmateh – Agricultural Engineering*, 52 (2017), nr. 2, 143-148
- [5]. Bernik P.S., Denisov P.D., Solona O.V., Vibrating mill, *Patent UA*, 43792 (2011)
- [6]. Kaletnik G.M., Yanovych V.P., Substantiation of operating and design parameters of a gyration mill for the production of highly active premixes, *Vibrations in engineering and technology*, 84 (2017), nr. 1, 15-21
- [7]. Kupchuk I.M., Solona O.V., Derevenko I.A., Tverdokhlib I.V., Verification of the mathematical model of the energy consumption drive for vibrating disc crusher, *Inmateh – Agricultural Engineering*, 55 (2018), nr. 2, 111-118
- [8]. Lanets O., Derevenko I., Borovets V., Kovtonyuk M., Komada P., Mussabekov K., Yeraliyeva B. Substantiation of consolidated inertial parameters of vibrating bunker feeder, *Przeglad Elektrotechniczny*, 95 (2019), nr. 4, 47-52
- [9]. Bulgakov V., Adamchuk V., Kaletnik G., Arak M., Olt J., Mathematical model of vibration digging up of root crops from soil, *Agronomy Research*, 12 (2014), nr. 1, 41-58
- [10]. Yanovych V., Tsurkan O., Polevoda Yu, Development of the vibrocentric machine for the production of a basic mixture of homeopathic preparations, *Scientific Bulletin, Series D: Mechanical Engineering*, 81 (2019), nr. 2, 13-26
- [11]. Vedmitskiy Y. G., Kukharchuk V. V., Hraniak V. F., New nonsystem physical quantities for vibration monitoring of transient processes at hydropower facilities, integral vibratory accelerations, *Przeglad Elektrotechniczny*, 93 (2017), nr.3, 69-72
- [12]. Yaroshevych T.S., Sylyvoniuk A.V., Yaroshevych M.P., Dynamics of running of vibrating machines with two unbalanced exciters that self-synchronize, *Bulletin of the Sevastopol National Technical University. Mechanics, power engineering, ecology*, 137 (2013), 49-54
- [13]. Zabrodets I.P., Yaroshevych M.P., Tolstushko M.M., Martyniuk V.L., Dynamics of starting up vibration machines with inertial exciters of oscillations taking in to account the elasticity of the drive, *Bulletin of Kharkiv National Technical University of Agriculture named after Petr Vasilenko*, 178 (2016), 140-147
- [14]. Kukharchuk V.V., Kazyv S.S., Bykovsky S.A., Discrete wavelet transformation in spectral analysis of vibration processes at hydropower units, *Przeglad Elektrotechniczny*, 93 (2017), Nr 5, 65-68
- [15]. Ruchynskiy M., Nazarenko M., Pereginets I., Kobylanskiy O., Kisala P., Abenov A., Amirgaliyeva Zh. Simulation and development of energy-efficient vibration machines operating in resonant modes, *Przeglad Elektrotechniczny*, 95 (2019), nr. 4, 60-64
- [16]. Bulgakov V., Pascuzzi S., Ivanovs S., Kaletnik G., Yanovych V., Angular oscillation model top predict the performance of a vibratory ball mill for the fine grinding of grain, *Biosystems engineering*, 171 (2018), 155–164
- [17]. Bulhakov V.M., Adamchuk V.V., Kaletnik G.M., Chernysh O.M., Theoretical study of forced harmonic vibrations in vibration drives of machines, *Vibrations in engineering and technology*, 82 (2016), nr. 2, 5-9
- [18]. Solona O.V., Kots I.V., Vasilenko T.V., Melnyk A.Yu., Vibrating mill, *Patent UA*, 94905 (2014)
- [19]. Solona O.V., Yanovych V.P., Melnyk O.S., Vibrating mill, *Patent UA*, 109539 (2016)
- [20]. Solona O.V., Vibration mills with space-circulation loading for fine grinding of bulk materials, *Vinnitsia State Agrarian University*, 2008, 133